



TRAPEZOIDAL SHEET


QUALITY S250GD - S280GD

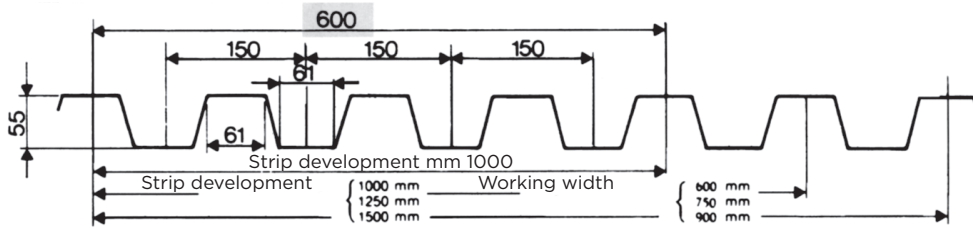

Static specifications							
Thickness mm		0.6	0.7	0.8	1.0	1.2	1.5
weight kg/m ²		7.85	9.15	10.46	13.08	15.70	19.62
weight kg/m length	1000	4.71	5.49	6.28	7.85	9.42	11.77
	1250	5.88	6.86	7.85	9.81	11.77	14.17
	1500	7.06	8.24	9.42	11.77	14.13	17.66
J cm ⁴ /m		41.76	51.16	59.89	78.23	96.83	122.74
W cm ³ /m		14.37	18.06	21.59	27.66	33.31	41.31

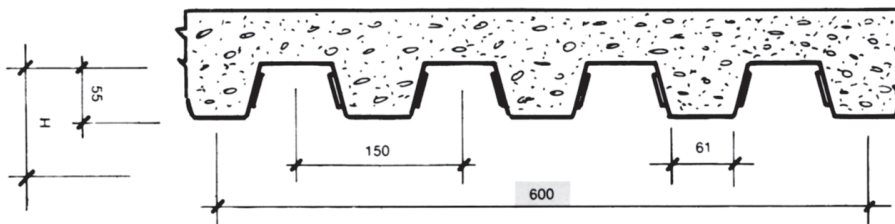

Static specifications					
Thickness mm	0.7	0.8	1.0	1.2	1.5
weight kg/m ²	9.15	10.46	13.08	15.70	19.62
weight kg/m length	5.49	6.28	7.85	9.42	11.77
J cm ⁴ /m	50.05	59.15	77.63	96.48	122.52
W cm ³ /m	15.38	18.52	25.00	31.81	41.22

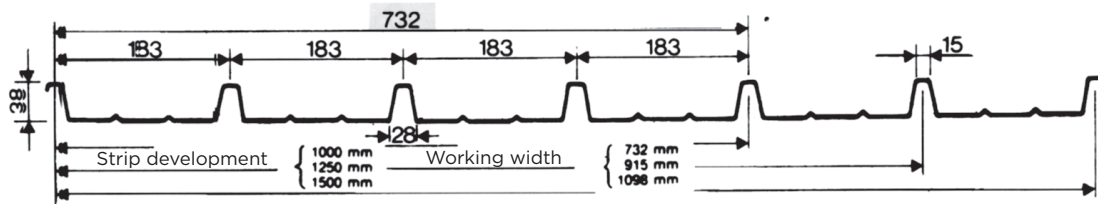

Static specifications					
Thickness mm		0.6	0.7	0.8	1.0
weight kg/m ²		6.42	7.49	8.57	10.72
weight kg/m length	1000	4.71	5.49	6.28	7.85
	1250	5.88	6.86	7.85	9.81
	1500	7.06	8.24	9.42	11.77
J cm ⁴ /m		13.79	16.04	18.31	22.83
W cm ³ /m		4.75	5.55	6.36	7.98

Manufactured according to EN 1090 standards.
 In regard to size, manufactured according to EN 10162 standards.
 Material quality according to EN 10346 standards.